


Cylinder cylinder type	optional switch	Matching fixture
Standard round cylinder 	DFGG AG-49/AG-59 AG-26/AG-27/DFGH	PBN fixing straps PBL fixing straps PBN fixing steel belt

PBNstraps


Applicable to full bore round cylinders




- ★ Can be used with DFGG or DFGH series
- ★ shear steel with notched guide
- ★ Hidden cutout design, safe and scratch-resistant

*For details, please consult Airifu service hotline or major national agents


(For detailed installation method, please refer to page 45)

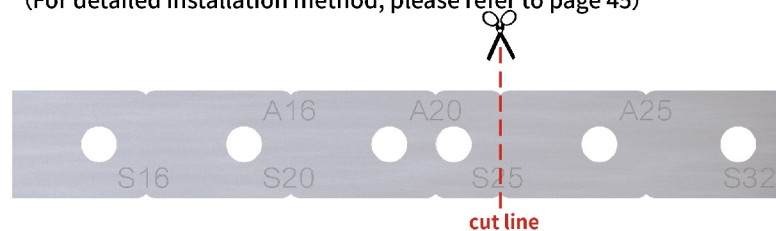

step 1 Cut from the guide mark corresponding to the cylinder bore size

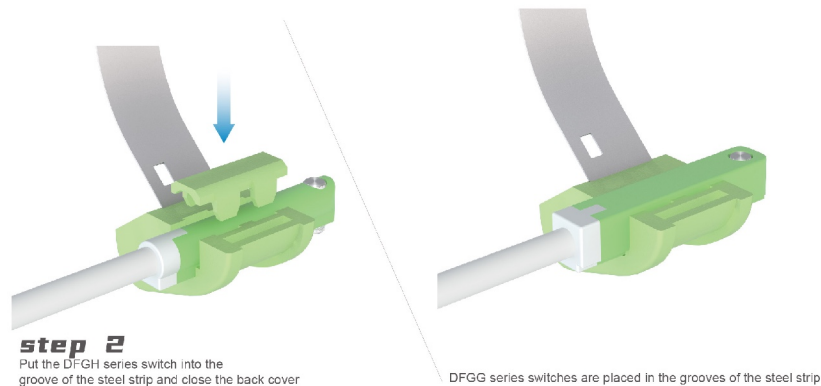

step 2
Put the DFGH series switch into the groove of the steel strip and close the back cover

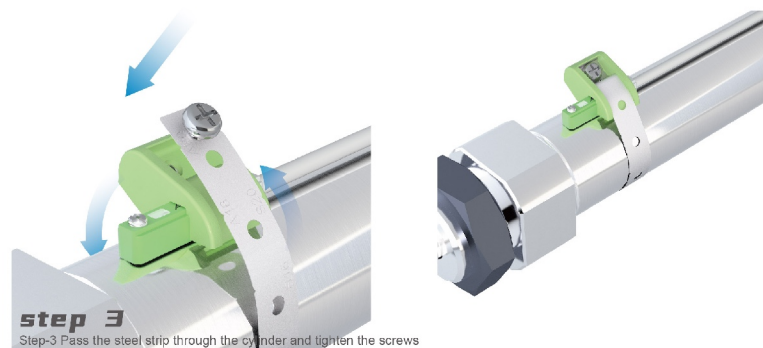

step 3
Step-3 Pass the steel strip through the cylinder and tighten the screws


PBN fixing straps Fixed DFGH/DFGG on full bore round cylinder Installation Notes

find the belt
Guide mark corresponding to cylinder bore size


step 1

A: Aluminum alloy steel cylinder S: Stainless steel cylinder


PBN-01	PBN-02
S06-S32	S06-S63
A16-A25	A16-A63

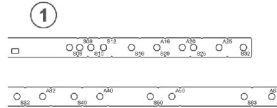


step 2 Cut the strip according to the notch guidelines




step 3 Screw the screw into the hole at the end of the strip



step 4 Put the DFGH series switch into the groove of the steel strip and close the back cover
Put the DFGG series switch into the groove of the steel strip

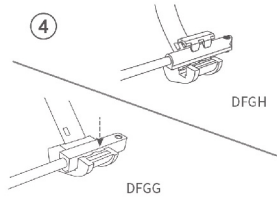

step 5 After adjusting the position of the steel belt around the cylinder, tighten the screw

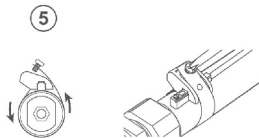

step 6 The installation is complete



Product Size (mm)	18*12*10
Color	BLACK
Product Weight	4g
Material	Engineering Plastics&Stainless Steel
Ambient Temperature	-10°C~70°C
Environmental Grade	RoHS/REACH
Fire-proof Level	UL94V0
Suitable Sensor	DFGG/DFGH
Application Scenarios	Round Cylinder